










BMTRADA

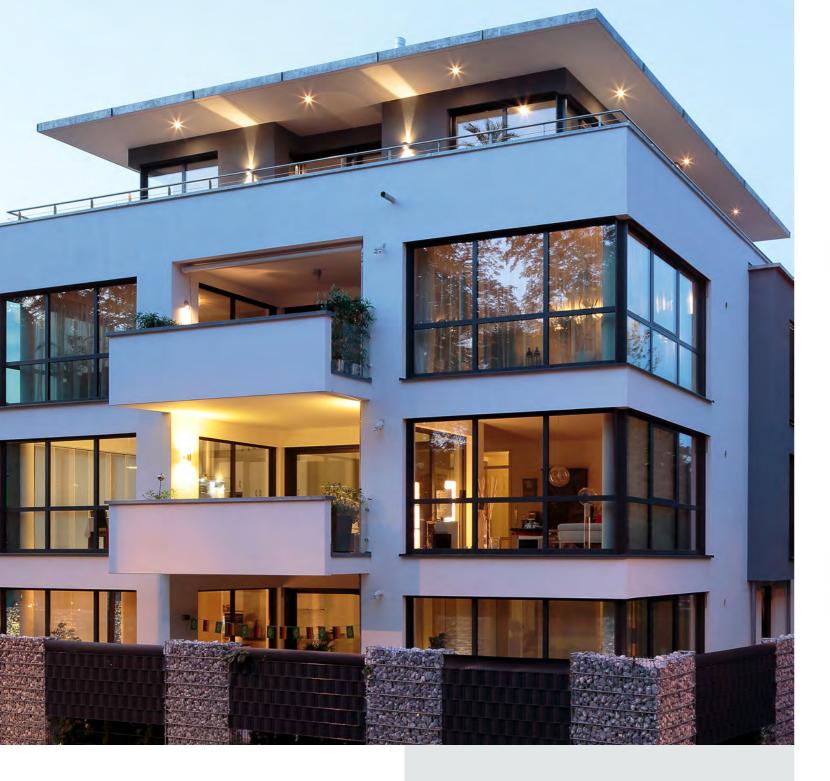



HIGH QUALITY WINDOWS

Functional benefits are combined with architectural and design features. Benefits such as high thermal insulation, narrow face widths, concealed, traditional manual or integrated electromechanical fittings are combined in perfectly integrated components for inward and outward-opening windows.

High thermal insulation

Concealed vent frame option

Very narrow face widths from 67mm

External face width of 50mm

Many design options available



Size Limits

Maximum Length	2500mm
Maximum Width	1700mm
Maximum Weight	160kg

PROFILE DEPTH	70mm
	6mm - 45mm
GLAZING METHOD	Beaded
SECURITY	PAS 24

PERFORMANCE		
U-VALUE	From 1.2 W/m ² K	
	Class 4	
WATER TIGHTNESS	Class 9A	
	Class C5/B5	